

560-580W Mono FULL BLACK

144 Half-Cell Layout

182mm Cell



N-TOPCon Cell Technology



Full Black Appearance for Aesthetic Effect



SMBB Half Cut Cell Technology




Excellent Anti-PID Low LID Performance




Less Hot Spot Shading Effects



Higher Power Output Lower BOS & LCOE

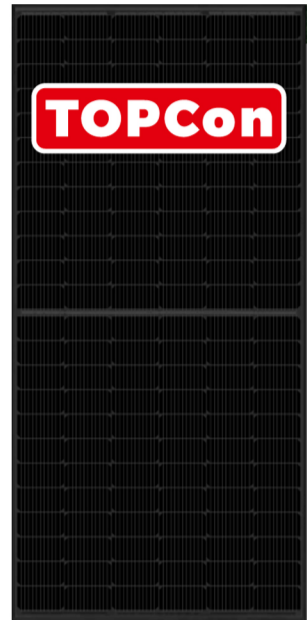

Linear Performance Warranty

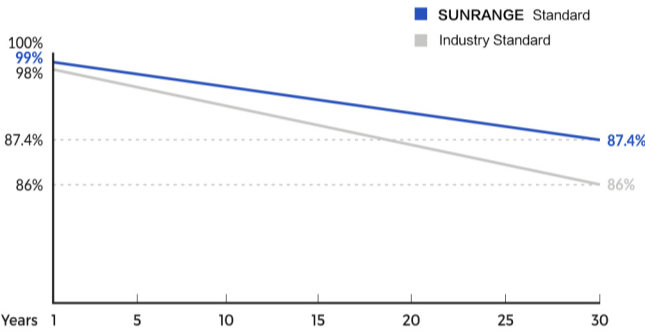

* SUNRANGE: Standard warranty 15 years, can be extended up to 20 years.

Insured By




Comprehensive Certificates

- ISO9001:2015 QMS
- ISO14001:2015 EMS
- ISO45001:2018 OHSMS
- IEC60068-2-68 Dust & Sand
- IEC61701 Salt Mist Corrosion
- IEC716 Ammonia Corrosion



MECHANICAL CHARACTERISTICS

Solar Cells	N-type Mono
No. of Cells	144 (6x24)
Dimensions	2279 x 1134 x 35mm (30mm)
Weight	27.5kg
Front Glass	3.2mm coated tempered glass
Frame	Anodized aluminium alloy
Junction Box	Ip68 rated (3 by pass diodes)
Output Cables	4.0mm ²
	300mm (+) / 300mm (-) or customized
Frame Size	35mm (30mm optional)
Connectors	Mc4 compatible
Mechanical load test	5400Pa

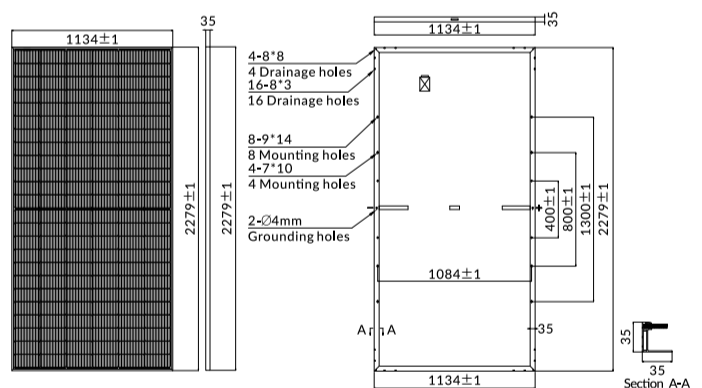

ELECTRICAL PARAMETERS


POWER CLASS	SR72P-560N		SR72P-565N		SR72P-570N		SR72P-575		SR72P-580N	
	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Maximum power (Pmax)	560W	421W	565W	425W	570W	429W	575W	433W	580W	437W
Open Circuit Voltage (Voc)	51.03V	48.41V	51.17V	48.60V	51.30V	48.78V	51.44V	48.96V	51.57V	49.14V
Short Circuit Current (Isc)	14.05A	11.33A	14.12A	11.39A	14.19A	11.45A	14.26A	11.51A	14.33A	11.57A
Voltage at Maximum power (Vmpp)	42.49V	39.31V	42.64V	39.46V	42.79V	39.61V	42.94V	39.76V	43.09V	39.91V
Current Maximum Power (Imp)	13.18A	10.71A	13.25A	10.77A	13.32A	10.83A	13.39A	10.89A	13.46A	10.95A
MODULE EFFICIENCY (%)	21.67%		21.86%		22.06%		22.25%		22.44%	

STC: Irradiance 1000W/m², cell temperature 25°C, AM1.5G NMOT: Irradiance 800W/m², ambient temperature 20°C, wind speed 1m/s, AM1.5G


PACKING CONFIGURATION

Container	40'HC (35mm)	40'HC (30mm optional)
Pieces per pallet	31	36
Pallets per container	20	20
Pieces per container	620	720

I-V CURVE

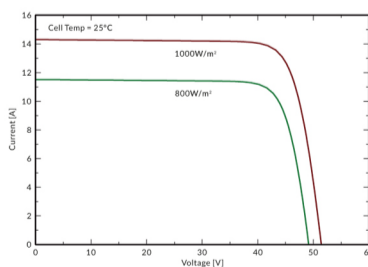

SR72P-575N

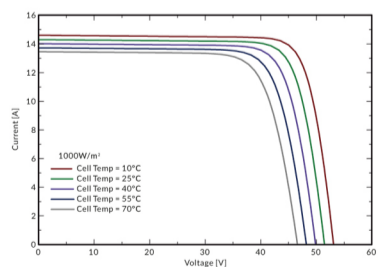

OPERATING CHARACTERISTICS

Operating Module Temperature	-40°C to +85°C
Maximum System Voltage	1500 DC (IEC)
Maximum Series Fuse Rating	25A
Power Tolerance	0/+5W

TEMPERATURE CHARACTERISTICS

Nominal Operating Temperature (NMOT)	45±2°C
Temperature Coefficient of Pmax	-0.29%/°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Isc	+0.045%/°C

Note: The specifications, data and technical characteristics provided in this data sheet are subject to changes due to continuous R&D, product innovation and improvement. SUNRANGE reserves the right to modify the information any time without prior notice.

Anhui Sunrange New Energy Technology Co., Ltd.

Add: 8th Floor, Block G, Phase III, 1201 Huafeng Road Shushan District, 230031 Hefei, China

Tel: +86 199 0966 3060

E-mail: info@sunrangepv.com

Website: www.sunrangepv.com