

440-460W Mono FULL BLACK

120 Half-Cell Layout

182mm Cell



Full Black Appearance for Aesthetic Effect


Gallium-doped Technology

Half Cut Cell Technology


Anti-PID Low LID Performance

Less Hot Spot Shading Effects

Ideal for Residential Rooftop Application

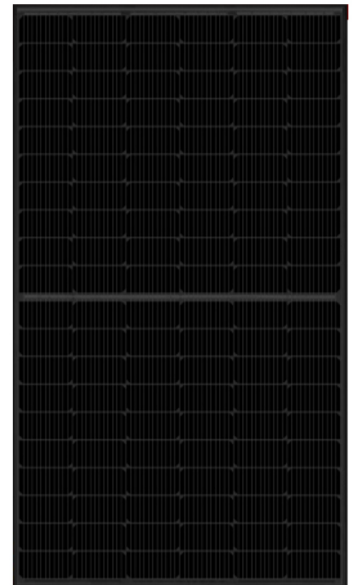

Linear Performance Warranty

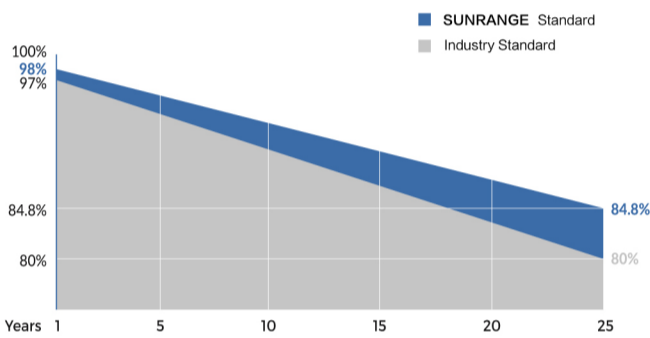

* SUNRANGE: Standard warranty 12 years, can be extended up to 15 years

Insured By




Comprehensive Certificates

- ISO9001:2015 QMS
- ISO14001:2015 EMS
- ISO45001:2018 OHSMS
- IEC61215/IEC61730 Standard Quality
- IEC61701/IEC62716 Salt/Mist/Ammonia Tests



MECHANICAL CHARACTERISTICS

| | |
|----------------------|-------------------------------------|
| Solar Cells | Mono |
| No. of Cells | 120 (6x20) |
| Dimensions | 1910 x 1134 x 35mm (30mm) |
| Weight | 23.0kg |
| Front Glass | 3.2mm coated tempered glass |
| Frame | Anodized aluminium alloy |
| Junction Box | Ip68 rated (3 by pass diodes) |
| Output Cables | 4.0mm ² |
| | 300mm (+) / 300mm (-) or customized |
| Frame Size | 35mm (30mm optional) |
| Connectors | Mc4 compatible |
| Mechanical load test | 5400Pa |

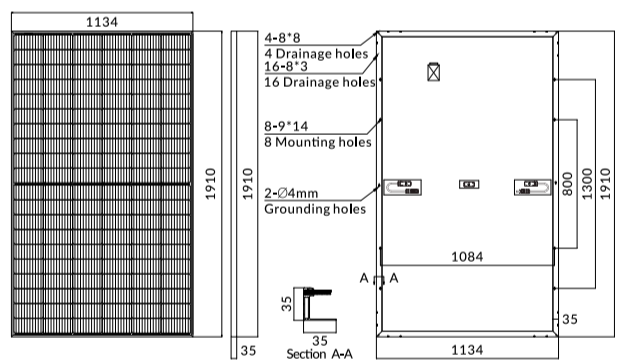

ELECTRICAL PARAMETERS


| POWER CLASS | SR60P-440M | | SR60P-445M | | SR60P-450M | | SR60P-455M | | SR60P-460M | |
|---------------------------------|------------|--------|------------|--------|------------|--------|------------|--------|------------|--------|
| | STC | NMOT | STC | NMOT | STC | NMOT | STC | NMOT | STC | NMOT |
| Maximum power (Pmax) | 440W | 331W | 445W | 335W | 450W | 339W | 455W | 343W | 460W | 347W |
| Open Circuit Voltage (Voc) | 41.94V | 39.56V | 42.12V | 39.83V | 42.31V | 40.09V | 42.49V | 40.35V | 42.68V | 40.62V |
| Short Circuit Current (Isc) | 13.58A | 10.87A | 13.65A | 10.91A | 13.72A | 10.95A | 13.79A | 10.99A | 13.86A | 11.03A |
| Voltage at Maximum power (Vmpp) | 34.67V | 32.29V | 34.87V | 32.56V | 35.07V | 32.82V | 35.27V | 33.08V | 35.47V | 33.33V |
| Current Maximum Power (Impp) | 12.69A | 10.25A | 12.76A | 10.29A | 12.83A | 10.33A | 12.90A | 10.37A | 12.97A | 10.41A |
| MODULE EFFICIENCY (%) | 20.31% | | 20.55% | | 20.78% | | 21.01% | | 21.24% | |

STC: Irradiance 1000W/m², cell temperature 25°C, AM1.5G NMOT: Irradiance 800W/m², ambient temperature 20°C, wind speed 1m/s, AM1.5G


PACKING CONFIGURATION

| | | |
|-----------------------|--------------|-----------------------|
| Container | 40'HC (35mm) | 40'HC (30mm optional) |
| Pieces per pallet | 31 | 36 |
| Pallets per container | 24 | 24 |
| Pieces per container | 744 | 864 |

I-V CURVE

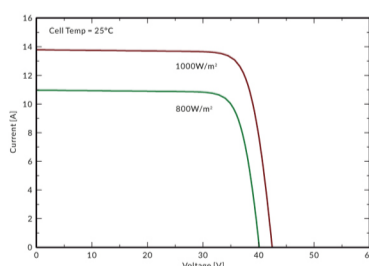

SR60P-455M

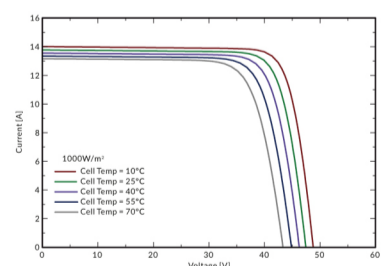

OPERATING CHARACTERISTICS

| | |
|------------------------------|----------------|
| Operating Module Temperature | -40°C to +85°C |
| Maximum System Voltage | 1500 DC (IEC) |
| Maximum Series Fuse Rating | 25A |
| Power Tolerance | 0/+5W |

TEMPERATURE CHARACTERISTICS

| | |
|--------------------------------------|-----------|
| Nominal Operating Temperature (NMOT) | 45±2°C |
| Temperature Coefficient of Pmax | -0.36%/°C |
| Temperature Coefficient of Voc | -0.28%/°C |
| Temperature Coefficient of Isc | +0.05%/°C |

Note: The specifications, data and technical characteristics provided in this data sheet are subject to changes due to continuous R&D, product innovation and improvement. SUNRANGE reserves the right to modify the information any time without prior notice.

Anhui Sunrange New Energy Technology Co., Ltd.

Add: 8th Floor, Block G, Phase III, 1201 Huafeng Road Shushan District, 230031 Hefei, China

Tel: +86 199 0966 3060

E-mail: info@sunrangepv.com

Website: www.sunrangepv.com