

30
years
POWER
WARRANTY

Up to
20
years
PRODUCT
WARRANTY

570-590W


Mono BIFACIAL DG

144 Half-Cell Layout


N-TOPCon Cell

N


N-TOPCon Cell Technology




SMBB Half Cut Cell Technology




Bifacial Cell Module Technologies




Excellent Anti-PID LoW LID Performance



Less Hot Spot Shading Effects

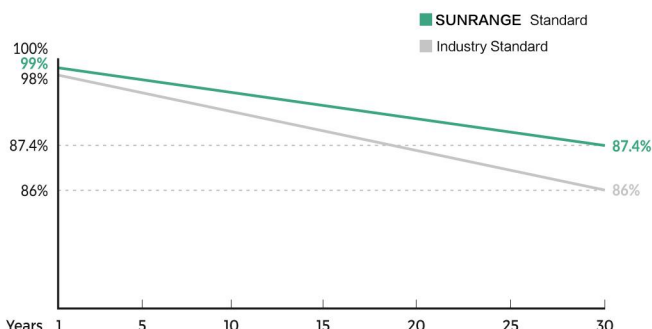


Higher Power Output Lower BOS & LCOE





TRANSPARENT / WHITE

Linear Performance Warranty





* SUNRANGE : Standard warranty 15 years, can be extended up to 20 years.

Insured By




Comprehensive Certificates

- ♦ ISO9001:2015 QMS
- ♦ ISO14001:2015 EMS
- ♦ ISO45001:2018 OHSMS
- ♦ IEC61215/IEC61730 Standard Quality
- ♦ IEC61701/IEC62716 Salt/Mist/Ammonia Tests



Anhui Sunrange New Energy Technology Co., Ltd.
Add:8th Floor, Block G, Phase III,1201 Huafeng Road Shushan District,230031 Hefei, China
Tel: +86 199 0966 3060
Eamil: info@sunrangepv.com
Website:www.sunrangepv.com

 **SUNRANGE**

Mono I 570–590W BIFACIAL DG

MECHANICAL CHARACTERISTICS

Solar Cells	N-type Mono
No. of Cells	144 (6x24)
Dimensions	2278 x 1134 x 30mm
Weight	31.5kg
Front Glass	2.0mm coated semi-tempered glass
Back Glass	2.0mm semi-tempered glass
Junction Box	Ip68 rated (3 by pass diodes)
	4.0mm ²
Output Cables	300mm (+) / 300mm (-)
	Length can be customized
Connectors	Mc4 compatible
Mechanical load test	5400Pa

ELECTRICAL PARAMETERS

POWER CLASS	SRD72P-570N		SRD72P-575N		SRD72P-580N		SRD72P-585N		SRD72P-590N	
	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Maximum power (Pmax)	570W	429W	575W	433W	580W	437W	585W	441W	590W	445W
Open Circuit Voltage (Voc)	51.41V	48.69V	51.55V	48.82V	51.68V	48.96V	51.81V	49.09V	51.94V	49.23V
Short Circuit Current (Isc)	14.15A	11.41A	14.22A	11.47A	14.29A	11.53A	14.36A	11.59A	14.43A	11.65A
Voltage at Maximum power (Vmpp)	42.41V	39.36V	42.56V	39.51V	42.71V	39.66V	42.86V	39.80V	43.00V	39.95V
Current Maximum Power (Impp)	13.44A	10.90A	13.51A	10.96A	13.58A	11.02A	13.65A	11.08A	13.72A	11.14A
MODULE EFFICIENCY (%)	22.07%		22.26%		22.45%		22.65%		22.84%	

STC: Irradiance 1000W/m², cell temperature 25°C, AM1.5G NMOT: Irradiance 800W/m², ambient temperature 20°C, wind speed 1m/s, AM1.5G

BIFACIAL OUTPUT-REARSIDE POWER GAIN

5%	Maximum power (Pmax)	599W	604W	609W	614W	620W
	Module Efficiency STC (%)	23.17%	23.37%	23.57%	23.78%	23.98%
15%	Maximum power (Pmax)	656W	661W	667W	673W	679W
	Module Efficiency STC (%)	25.37%	25.60%	25.82%	26.04%	26.27%
25%	Maximum Power (Pmax)	713W	719W	725W	731W	738W
	Module Efficiency STC (%)	27.58%	27.82%	28.07%	28.31%	28.55%

PACKING CONFIGURATION

Container	20'GP	40'HQ
Pieces per pallet	36	36
Pallets per container	5	20
Pieces per container	180	720

I-V CURVE

SRD72P-585N

OPERATING CHARACTERISTICS

Operating Module Temperature	-40°C to +85°C
Maximum System Voltage	1500 DC (IEC)
Maximum Series Fuse Rating	30A
Power Tolerance	0/+5W

TEMPERATURE CHARACTERISTICS

Nominal Operating Temperature (NMOT)	45±2°C
Temperature Coefficient of Pmax	-0.29%/°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Isc	+0.045%/°C

Note: The specifications, data and technical characteristics provided in this data sheet are subject to changes due to continuous R&D, product innovation and improvement. SUNRANGE reserves the right to modify the information any time without prior notice.